

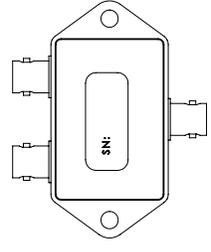
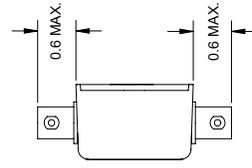
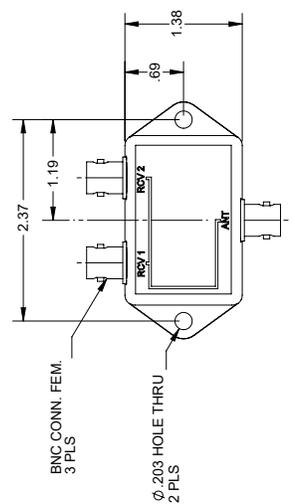


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
G	REF ECN 08-095	MN 12/19/08	DH 12/09/08
H	REF ECN 10-067	MN 09/09/10	DH 09/09/10
J	REF ECN 15-068	MN 08/28/15	DH 08/27/15
K	REF ECN 20-091	RM 12/21/20	DH 12/21/20
L	REF ECN 20-093	RM 2/11/21	DH 02/11/21
M	REF ECN 21-033	RM 4/29/21	DH 04/29/21

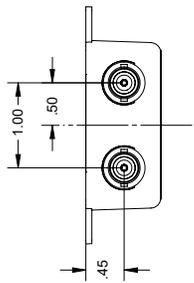

ISO VIEW

INSTALLATION DRAWING

ITEM NO.	DESCRIPTION	PART NUMBER	MATERIAL / SPECIFICATIONS
PARTS LIST			
UNLESS OTHERWISE SPECIFIED			
DIMENSIONS ARE IN INCHES			
TOLERANCES UNLESS OTHERWISE SPECIFIED			
DEC. XX ± .03 .XXX ± .010			
FRACTIONS ± 1/16 .ANGLES ± 1°			
MACHINE FINISH 125 ✓ PER ANSF-B46.1			
SHARP EDGES 0.15 MAX			
MEET DIMENSIONS BEFORE PLATING			
DIMENSIONS ARE PER ASME Y14.5M			
MATERIAL :			
DO NOT SCALE DRAWING			
CONTRACT NO.			
APPROVALS			
DATE	DRAWN	CHECK	ENGR
04/20/04	H. NGUYEN	J. GOMEZ	R. GOMEZ
05/05/04			
05/16/04			
05/06/04	OC	C. DARABAN	
05/06/04	APPD	D. HOLLOWAY	
NEXT ASSY USED ON APPLICATION			
PART DASH NO.			
SCALE: 1/1			
CAD FILE: --			
SHEET : 1 OF 1			

- NOTES: UNLESS OTHERWISE SPECIFIED.
- RF CHARACTERISTICS
 - FREQUENCY 108 TO 118 MHz
 - VSWR 1.5:1 MAXIMUM
 - R/I -13.98 dB
 - INSERTION LOSS 3.5 dB MAXIMUM
 - ISOLATION 20 dB MINIMUM
 - IMPEDANCE 50 OHMS
 - WEIGHT : .25 LB. MAX.
 - ISO C34e, C40c

ASSY DWG. C50208

Comant Industries, Inc.
COUPLER - ANTENNA, VOR

BWG SIZE	CODE IDENT	BWG. NO.	REV
C	51351	CI 502	M