

SPECIFICATIONS:

- 1) TSO Compliance: TSO C129
Applicable Documents: RTCA DO-160C, DO-208
- 2) Operating Temperature Range: -55°C to +70°C
- 3) Humidity: 95% Non-Condensing.
- 4) Altitude Range: 0 to 55,000 ft.
- 5) Vibration: Cat. M and N.
- 6) Operational Shock: Rigid Mounting, 6G Operational 15G Crash Safety.
- 7) Current: 0.30 Amps typical.
- 8) Controls:
 - NAV/GPS: Alternate action switch.
 - OBS: Momentary switch.
- 9) Annunciations and colors:
 - NAV: white.
 - GPS: green.
 - INTG: amber.
 - TERM: green.
 - APR: green.
 - MSG: amber.
 - AUTO: white.
 - OBS: green.
 - WPT: amber.
- 10) Overall color shall be black.
- 11) Weight shall be 0.30 lbs.


25 PIN MALE
D-SUB CONNECTOR

INTG ANN.	20
SPARE	6
APR ANN.	9
WPT ANN.	8
MSG ANN.	10
TERM ANN.	3
NAV ANN.	2
GPS ANN.	1
LAMP TEST	7
OBS MODE SELECT	12
SPARE	11
OBS ANN.	24
EXT. RELAY ENERGIZE	4
ILS ENERGIZE	14
28VDC POWER	13
NAV CIRCUIT BREAKER	15
GROUND	25
28V DIMMER IN	5

NOTE: Refer to manual number 9010760 for installation information.

Revisions				
ECO	Rev.	Description	Date	Approved
2740	A	Add 7016942 decal, top level assy was 8019440-2, remove ALT.	4/26/02	JBR/Sch
3211	B	0.125 was 0.08. Rearrange drawing, current spec. was 0.4A.	5/29/03	DDT/Sch

Logo and company name have been changed in title block only. No functional or technical changes have been made. Revision remains unchanged.

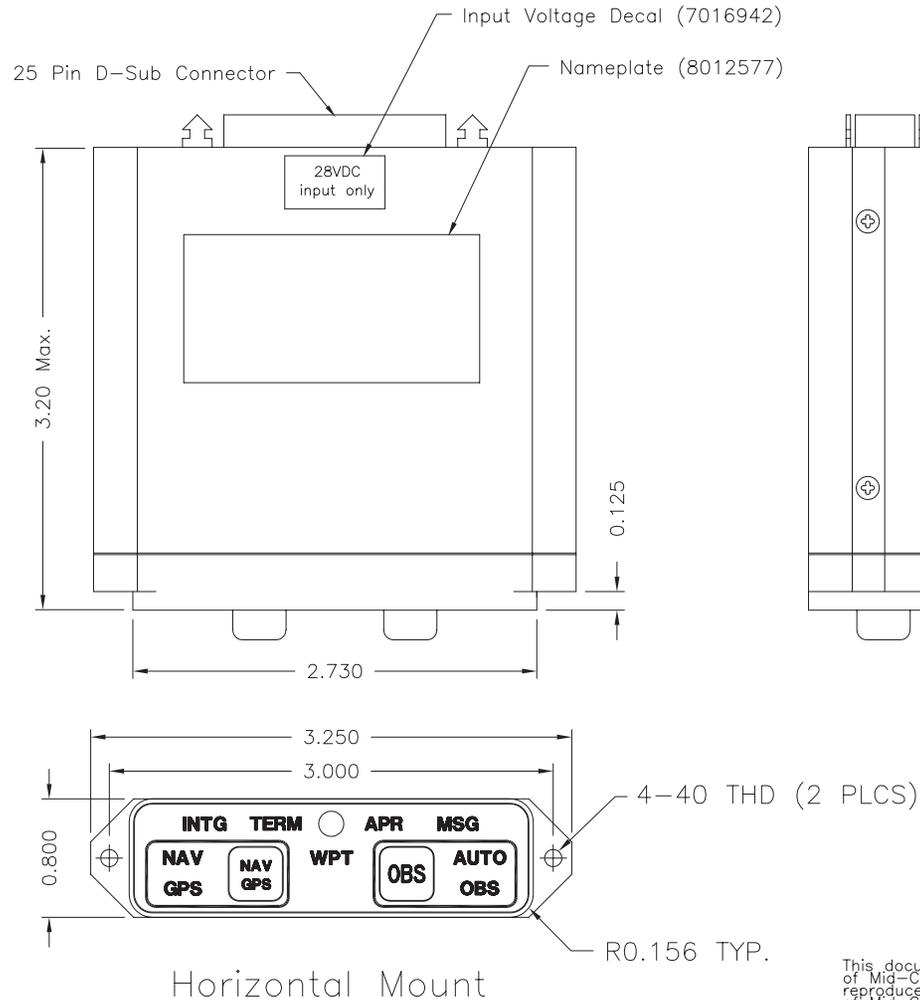

This document discloses proprietary information of Mid-Continent Instrument Co., Inc. It may be reproduced or disclosed only with written permission of Mid-Continent Instrument Co., Inc. and is not to be used in any way detrimental to the interests of Mid-Continent Instrument Co., Inc.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCE: FRACTIONAL = ±1/64 .XX = ±.020 .XXX = ±.010 .XXXX = ±.002 ANGULAR = ±0.5° CONCENTRICITY: .005 TIR BREAK ALL SHARP EDGES THREADS PER MIL-S-7742	DRAWN	S. Hoang	05/01/01		TITLE: ANNUNCIATION CONTROL UNIT	PART NUMBER: MD41-1408A
	APPROVED	B. Barnes	05/01/01			
	TOP LEVEL ASSY:	9015254-2			SCALE: None	SHEET 1 of 1
	USED ON:					
SURFACE ROUGHNESS	CODE IDENT. NO.:	59742				