



MIL-ALDCBS1X4

Military Amplified '3Z4' GPS Urthvgt Technical Product Data



Features

- **Amplifier Gain 22dB typical**
- **Passes all GNSS Frequencies (Entire L-band)**
- **Extremely Flat Group Delay**
Less than 1ns variation
- **Military Qualified 1X2 Splitter**
MIL STD 810F, MIL STD 704
- **Excellent Gain Flatness**
 $|J1 - J2| < 1.0\text{dB}$
- **DC Blocked Outputs Feature 200Ω Loads**
Prevent antenna alarm faults from connected devices
- **Phase Matched Outputs**
 $\text{Phase } (J1 - J2) < 1.0^\circ$
- **Special Configurations Available By Request**
- **Qual Test Summary Certification Available**

Description

The MIL-ALDCBS1X2 GPS Splitter (GNSS Splitter) is a one input, two output amplified splitter based on the Wilkinson splitter design. The frequency response covers the entire L-band (all GNSS Frequencies) with excellent gain flatness. All Mil Spec splitters passed rigorous MIL-STD 810F testing detailed in the separate Qual Test Summary Certification. The MIL-ALDCBS1X2 is standard hermetically sealed, EMI Shielded, Weatherproofed and configured with MIL-STD-704 compliant power options. Each DC blocked output is loaded with a 200Ω resistor to simulate the antenna current draw to prevent false antenna alarm faults. Contact GPS Networking Technical Support for any questions regarding standard configurations or special configurations at salestech@gpsnetworking.com or 1-800-463-3063.

Electrical Specifications, $T_A = 25^{\circ}\text{C}$

Parameter	Conditions	Min	Typ	Max	Units
Freq. Range	Ant – J1, J2 - 50Ω ; Ant – J2, J1 - 50Ω	1.1		1.7	GHz
In/Out Imped.	Ant, J1, J2		50		Ω
Gain		20.5	22.0	23.5	dB
Input SWR	All ports - 50Ω			2.0:1	-
Output SWR	All ports - 50Ω			1.5:1	-
Noise Figure	Ant – J1, J2 - 50Ω ; Ant – J2, J1 - 50Ω		3.3	3.5	dB
Gain Flatness	L1 – L2 ; Ant – J1, J2 - 50Ω ; Ant – J2, J1 - 50Ω		0.5	1.5	dB
Amplitude Balance	J1 – J2 ; Ant – J1, J2 - 50Ω ; Ant – J2, J1 - 50Ω			1.0	dB
Phase Balance	Phase (J1 – J2) ; Ant – J1, J2 - 50Ω ; Ant – J2, J1 - 50Ω			1.0	deg
Isolation	J1 – J2, Ant - 50Ω	18	22	26	dB
Group delay Flatness	$\tau_{d,max} - \tau_{d,min}$: Ant – J1, J2 - 50Ω ; Ant – J2, J1 - 50Ω			1	ns
Req. DC Input V.	Non-Network Configuration, DC Input on J1	3.6		15	Vdc
P1 dB	Output Power @ 1dB Gain Compression (f = 1.5GHz)		--10		dBm
Current Draw (5v) ⁽¹⁾	Amplifier Current Draw, All ports - 50Ω			15	mA

(1). Current draw on input DC port in the non-networked configuration.

Available Power Options (Networked Option)

External Power Options (Networked Option)		
Source Voltage Options	VOLTAGE INPUT	
	110VAC	Transformer (Wall Mount)
	220 VAC	Transformer (Wall Mount)
	240 VAC (United Kingdom)	Transformer (Wall Mount)
	Customer Supplied DC 9-32 VDC	Mil DC Connector (includes Mate Std)
Output Voltage Options ⁽¹⁾	DC VOLTAGE OUT	
	MAX CURRENT OUT FOR CORRESPONDING Vout ⁽²⁾	
	3.3 V	110mA
	5V	130mA
	9V	140mA
	12V	170mA
	15V	210mA
Custom	TDB	
Standard DC Configuration without External Power Option		
J1/Output 1 Pass DC, J2 Output 2 Block DC, Input Pass DC		
Standard DC Configuration with any External Power Option (AC/DC or Military DC)		
All DC Blocked Outputs include 200Ω Load Standard		
Any port can be custom selected to Pass or Block DC		
RF Connector Options		
Connector Options	CONNECTOR STYLE	
	CHARGE	
	Type N-female	NC
	Type SMA-female	NC
	Type TNC-female	NC
	Type BNC-female	NC
Other	Contact GPS Networking	


(1) With Networked Option, any RF port (input or output) can be selected Pass DC or Block DC.

(Contact GPS Networking Technical Support at 719-595-9880 or salestech@gpsnetworking.com for any questions regarding non-standard configurations and corresponding part numbers)

Part Number Configuration

Network Option (External Power Supply)
Requires '**N**', Output Voltage and Power Type

MIL 'N ALDCB S1X2 - N / 5 / 110

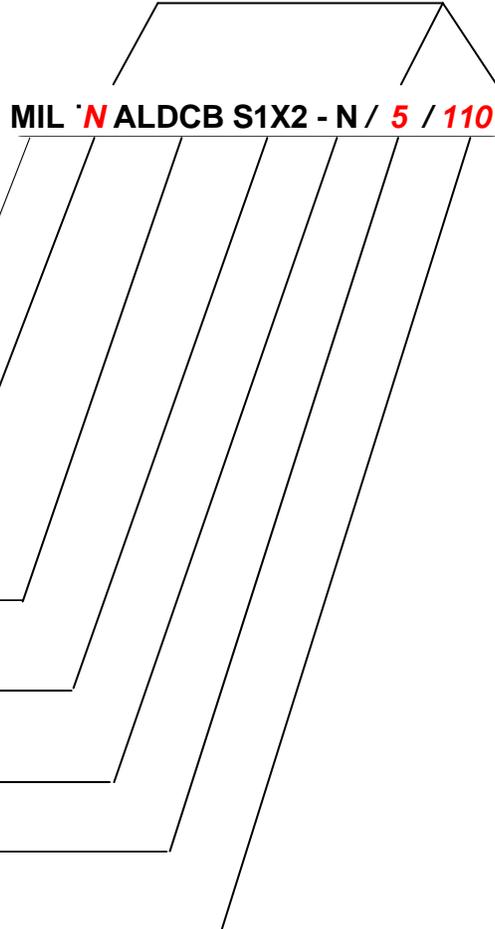

Mil Spec Splitter Option:
MIL = Includes Hermetically Sealed, EMI Shielding, Weatherproofing and Qual-Test Summary Certification

Network Option:
N = External Power; **Blank** = No External Power

DC Options:
DCB: DC Blocked; **PDC**: Pass DC

Splitter Type:
S1X2 = GPS Splitter 2 Outputs

Connector Options (Type Female Standard):
N = N type; **S** = SMA; **T** = TNC; **B** = BNC

DC Output Voltage (**only with Network Option**):
3.3, 5, 9, 12, 15,

Source Voltage (**only with Network Option**):
110=110VAC, **220**=220VAC (2 prong Euro), **240**=240VAC (3 prong UK),
MC – Military DC Connector (User supplies DC voltage range 9-32VDC)

(Military DC Mating Connector is included standard with the MC power option)


When no external power supply option (AC or DC) is selected, Output 1/J1 is Pass DC standard. Whenever an external power supply option is selected, all outputs are DC blocked standard.

(Contact GPS Networking Technical Support at 719-595-9880 or salestech@gpsnetworking.com for any questions regarding non-standard configurations and corresponding part numbers)

Performance


MIL-ALDCBS1X2 (High Isolation Typical Gain)

Input SWR (Ant. port) and Frequency Response: Ant. To J1, J2, (Typical, Type N connectors)

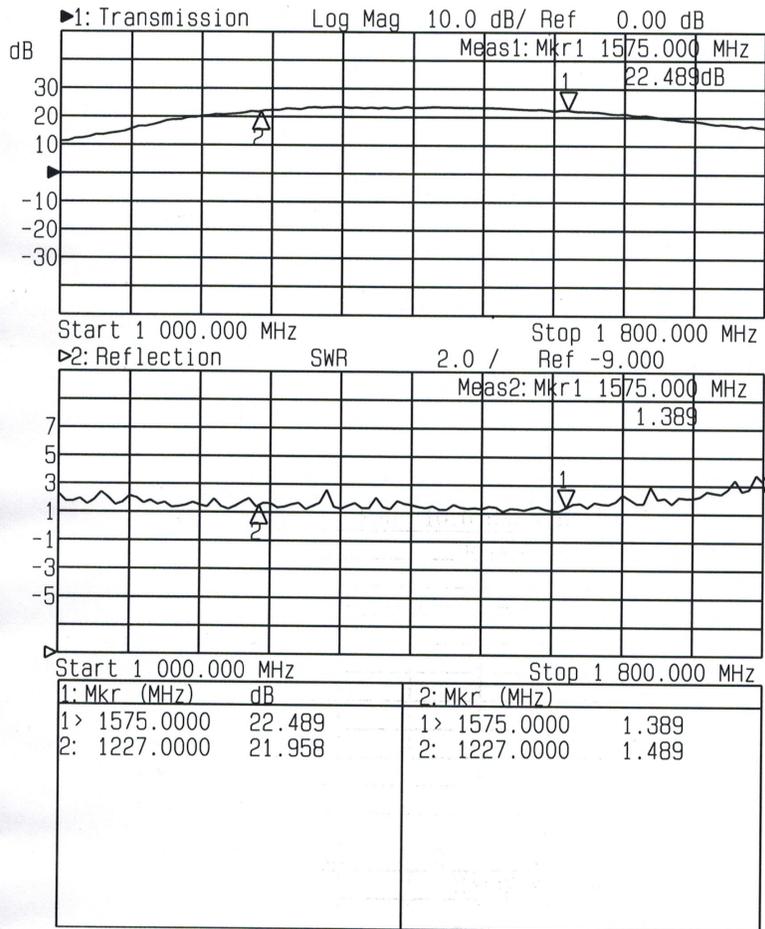

MIL-ALDCBS1X2 (High Isolation Option):

Output Isolation (J1-J2) and Output SWR (J1, J2) (Typical, type N connector):

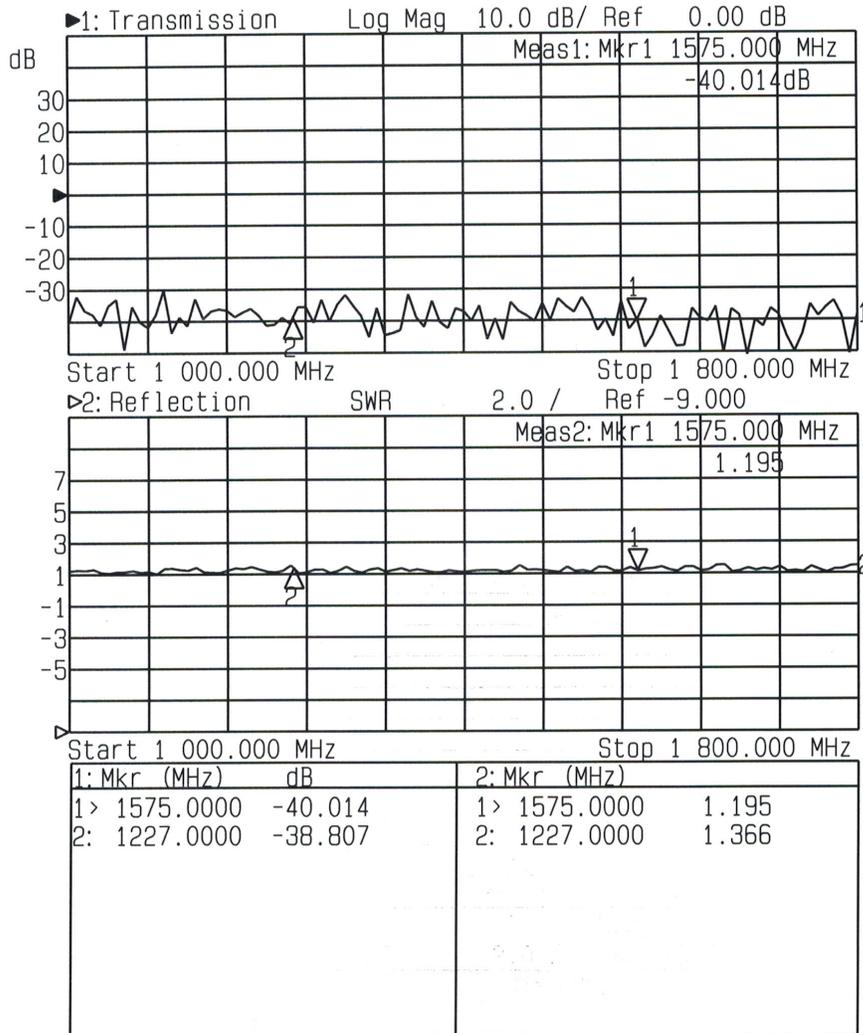

Mechanical

Dimensions: Height: 1.3"
 Length (not including connectors) Body: 2.5"
 Base Plate: 3.25"
 Width (not including connectors): 2.5"
Weight: 12 oz. (344 grams)

Operating Temp. Range: -40° to + 75°C

Finish Housing and Base Plate: ELECTROLESS NICKEL PLATED
 MIL-C-26074C CLASS 1, .0001-.0003 MAX
 Finish Lid: ANODIZE, TYPE II, CLASS 2, BLACK, per MIL-A-8625

4X Ø .166 THRU ALL
 MC-Military DC connector (optional)

REVISIONS				
ZONE	REV.	DESCRIPTION	REV. BY	DATE
	A	INITIAL RELEASE	-	-

GPS NETWORKING		Assy, 1x2		Do Not Scale Dwg. Remove All Burrs And Sharp Edges for 200 Rod Max
Drawn by BPC	Date 06/22/15	Checked by	Checked by	Material
Quantity	Prod. Req.	Prod. Req.	Prod. Req.	1/2" = 6.350 3/32" = 2.312 1/16" = 1.562
Part Name	Part No.	Part No.	Part No.	Assy 1/2"
Part Description	Part No.	Part No.	Part No.	Surface Treat Unit Weight
Dwg. Number Assy, 1x2	SIZE B	SHEET -	1 OF 1	Part Dimensions Unit Weight

-EMI shielding gaskets can increase listed product dimensions by up to 0.02 inches per axis